

## TECHNICAL DATA SHEET

**Code items :** 1/120/5 and 1/240/5

**Description:** mobile waste container for differential refuse collection capacity 120 and 240 liters with lid.

**Material:** PEHD (high density polyethylene)

**Colours:** BIL (white) – BLB (blue) – BRB (brown) – GIA (yellow) – GRB (grey) – ROB (red) – VEB (light green) – VES (dark green)

**Note:**

The product is certified by TUV according to EN 840 1-5-6.

Product classification : class I and frontal receiver type A.

42-44 micron galvanized steel axle and two rubber wheels diameter 200 mm.

Pulling force < 60 N.

According to Directive 2000/14/CE (sound emission level less than 97dB).

Available also with galvanized pedal lid opener and bag holder ring (codes 1204 and 2404).



---

**MOBIL PLASTIC S.p.A.**


Via Robbio, 31 - 27030 Confienza (PV) - ITALIA

Tel. +39 0384 674692 (3 linee r.a.) - Fax +39 0384 674696

Web site: <http://www.mobilplastic.it> e-mail: [info@mobilplastic.it](mailto:info@mobilplastic.it)

Reg. Impr. Pavia, P. IVA e C. F. IT 00186030185

CAPITALE SOCIALE € 500.000,00 I.V. - R.E.A. PV n° 125850

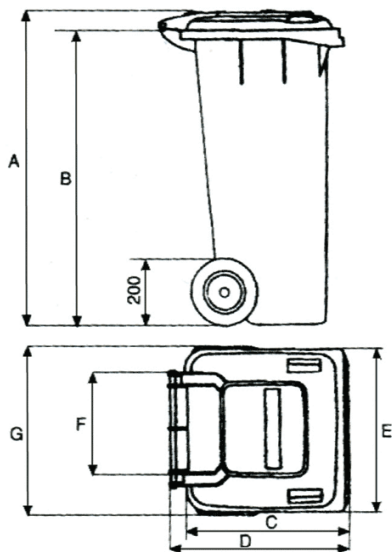

	120 l	240 l
A	930 mm	1070 mm
B	875 mm	995 mm
C	485 mm	655 mm
D	550 mm	730 mm
E	480 mm	580 mm
F	355 mm	420 mm
G	480 mm	570 mm

Physical features	120 litres	240 litres
Average thickness for bin	± 4 / 4,5 mm	± 4 / 4,5 mm
Average thickness for lid	± 3 / 3,5 mm	± 3 / 3,5 mm
Weight (kg)	9	13
Load capacity (kg)	60	116
Packing pcs	1	1

### Material characteristics :

Features	u.m.	120 litres	240 litres
Density (at 23°C )	g/cm <sup>3</sup>	> 0.94	> 0,94
Max operating temperature	°C	< + 80	< + 80
Min operating temperature	°C	> - 20	> - 20
Impact strenght	kJ/m <sup>2</sup>	> 210	> 210
Impact strenght after aging	kJ/m <sup>2</sup>	> 110	> 110
Admissible total mass	kg	60	116
Nominal capacity	l	120	240
Receiver type	-	A	A
Flame resistance grade (UL94)	-	HB	HB

Producer name / trade mark : on the bottom of the body.

Month and year of production : in the bottom side of the lid.

Sound emission level according to Directive 2000/14/CE : on the upper side of the lid.

#### MOBIL PLASTIC S.p.A.

Via Robbio, 31 - 27030 Confienza (PV) - ITALIA

Tel. +39 0384 674692 (3 linee r.a.) - Fax +39 0384 674696

Web site: <http://www.mobilplastic.it> e-mail: [info@mobilplastic.it](mailto:info@mobilplastic.it)

Reg. Impr. Pavia, P. IVA e C. F. IT 00186030185

CAPITALE SOCIALE € 500.000,00 I.V. - R.E.A. PV n° 125850